

BLANCOTHERM

BLANCOTHERM K synthetic

BLANCOTHERM K, unheated	38
BLANCOTHERM K, heated/convection-heated	40
Accessories for BLANCOTHERM K	42

BLANCOTHERM E stainless steel

BLANCOTHERM E, unheated	44
BLANCOTHERM E, heated	45
BLANCOTHERM E, cooled	46
Accessories for BLANCOTHERM E	46





BLANCOTHERM 620 KUF

(with accessories)

Plenty of space: The model with the largest capacity. The hinged door can be swiveled 270° and is removable.



BLANCOTHERM 320 ECO

The starter model: Unheated, with lid, easy to open.



BLANCOTHERM 320 KBR

(with accessories)

The innovation: Top loader, heatable, temperature regulation accurate to the degree and LED display for indicating the interior temperature.

Appetizingly transported, appetizingly packed – BLANCOTHERM K synthetic food transport containers

Hot and cold food is excellently kept hot or cold in the BLANCOTHERM K in convincing 5-star quality. Both outside and inside, the BLANCOTHERM K offers convincing technology, design, function and accessories.



Outstanding food quality

Heatable BLANCOTHERM with interior temperature adjustable down to the degree from +40 °C to +85 °C or +95 °C. A BLANCO innovation.



Stainless steel interior

BLT 320 KB and 320 KBR with stainless-steel inlet for direct loading.



Handy ergonomics

Stainless-steel carrying handle with non-slip synthetic grip.



Quick information

Practical menu card holders show what has been cooked.



Securely fastened

Recesses for crossbars so that even small GN containers are securely seated.



Perfectly closed

Lock at the top for easy opening, even when containers are located directly next to each other.



Condensation water trough

Four new BLT models for additional safety: The trough catches escaping condensation water, minimizing the danger of slipping and injuries.




Absolutely hygienic

All BLANCOTHERM K units are dishwasher-safe.



Environmentally friendly

The synthetic used is CFC-free, recyclable and food-resistant.

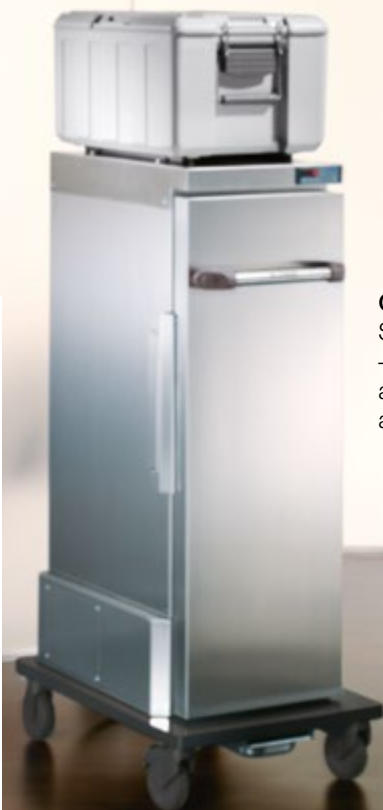

Compatibly designed
Stainless steel or synthetic
– BLANCOTHERM K and E
are absolutely compatible
and can be used together.



BLANCOTHERM BLT 1020 EUK

The cool type: Front loader with active convection cooling for HACCP-compliant refrigeration of food.



BLANCOTHERM BLT 820 EBTF

The multitalent: Top loader, front loader, convection heater and serving function in one.

Built for the entire life of a kitchen – BLANCOTHERM E stainless steel food transport containers

With BLANCOTHERM E you're excellently prepared for large quantities and everyday life in a large kitchen. Elegant appearance, perfected technology and maximum convenience make these food transport containers a desirable kitchen helper. Regardless of whether you choose the unheated model, the EB with a long-life convection heater or the EUK with powerful convection cooling.



User-friendly (EUK)

With the digital temperature control the temperature can be set exactly to the degree and verified.



Made easy

The heating module can easily be removed for cleaning. The mains plug is protected against impacts.

Leak-free

Thanks to the water-tight interior body in hygienic design H1 there are no dirty joints, which enables easy cleaning.

Uniformly cooled (EUK)

The special air baffle ensures a uniform cooling temperature in the entire interior.



A good move

Ergonomic push handle for effortless handling. The integrated bumper rail offers a high level of safety when manoeuvring.

Optimally solved (EUK)



Only condensed water results outside the usable space. It is collected in the easy-to-remove catch tray.

BLANCOTHERM synthetic

- Of food-resistant polypropylene
- Dishwasher-safe







BLT synthetic, ECO

Illustration	Model	Designation	Capacity	Dimensions L x W x H (mm)	Weight (kg)	Order No.	Price in € w/o VAT
	BLT 320 ECO-C	BLANCOTHERM 320 ECO-C synthetic food transport containers for positioning several GN containers GN 1/1 or their subdivisions on top of one another, with clamped lid, with moulded skids and handles	4x GN 1/1-55 or their subdivisions 3x GN 1/1-65 or their subdivisions 2x GN 1/1-100 or their subdivisions 1x GN 1/1-200 or their subdivisions	630 x 415 x 345 mm	7.5 kg	573 956	
	<u>BLT 320 ECO</u>	BLANCOTHERM 320 ECO synthetic food transport container, with lid, with moulded skids and handles	GN 1/1-200 or their subdivisions	630 x 415 x 345 mm	7 kg	564 650	

For stacking GN containers

BLT synthetic, unheated

BLT 160 K (shown with accessories: GN containers) 	<u>BLT 160 K</u>	BLANCOTHERM 160 K synthetic food transport container, with lid	GN 1/1-100 or their subdivisions	630 x 425 x 230 mm	7 kg	566 240	
BLT 320 K 	<u>BLT 320 K</u>	BLANCOTHERM 320 K synthetic food transport container, with lid	GN 1/1-200 or their subdivisions	630 x 425 x 340 mm	8 kg	566 241	
BLT 420 K 	<u>BLT 420 K</u>	BLANCOTHERM 420 K synthetic food transport container, with hinged door	2x GN 1/1-150 or their subdivisions 11 pairs of support ledges with spacing of 31 mm	670 x 445 x 475 mm	12 kg	573 514	
BLT 620 KUS (shown with accessories: GN containers) 	<u>BLT 620 KUS</u>	BLANCOTHERM 620 KUS synthetic food transport container, with lid, side lock	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	630 x 425 x 660 mm	15 kg	566 243	







BLANCOTHERM synthetic

- Of food-resistant polypropylene
- Dishwasher-safe



BLANCOTHERM

BLT synthetic, unheated







Illustration	Model	Designation	Capacity	Dimensions L x W x H (mm)	Weight (kg)	Order No.	Price in € w/o VAT
BLT 620 KV (shown with accessories: GN containers) 	<u>BLT 620 KV</u>	BLANCOTHERM 620 KV synthetic food transport container, with lid, top lock	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	630 x 425 x 660 mm	14 kg	564 358	
BLT 620 KUF (shown with accessories: GN containers) 	<u>BLT 620 KUF</u>	BLANCOTHERM 620 KUF synthetic food transport container, with hinged door, that can be opened to an angle of 270°	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	670 x 445 x 660 mm	15.5 kg	564 365	
BLT 620 KUF-F 	<u>BLT 620 KUF-F</u>	BLANCOTHERM 620 KUF-F synthetic food transport container, mobile, with synthetic castors in accord- ance with DIN 18867-8, 4 steering castors, 2 of which have brakes, with hinged door, can be opened to an angle of 270°	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	670 x 445 x 830 mm	25 kg	569 262	
BLT 620 KUF-F with condensation water trough 	<u>BLT 620 KUF-F</u> with condensa- tion water trough	BLANCOTHERM 620 KUF-F with condensation water trough synthetic food transport container, mobile, with synthetic castors in accord- ance with DIN 18867-8, 4 steering castors, 2 of which have brakes, with hinged door, can be opened to an angle of 270°	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	670 x 445 x 830 mm	25.7 kg	573 317	
BLT 620 KF 	<u>BLT 620 KF</u>	BLANCOTHERM 620 KF synthetic food transport container, mobile, with castors that comply with DIN 18867-8, synthetic, 4 steering castors, 2 of which have brakes with lid, side lock	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	630 x 425 x 830 mm	24 kg	564 350	
BLT 620 KF with condensation water trough 	<u>BLT 620 KF</u> with condensa- tion water trough	BLANCOTHERM 620 KF with condensation water trough synthetic food transport container, mobile, with synthetic castors in accord- ance with DIN 18867-8, 4 steering castors, 2 of which have brakes, with lid, side lock	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	630 x 425 x 830 mm	24.7 kg	573 316	

BLANCOTHERM synthetic

- Of food-resistant polypropylene
- Dishwasher-safe (convection-heated BLT without door only)



BLT synthetic, heated





Illustration	Model	Designation	Capacity	Dimensions L x W x H (mm)	Rating/ conn. load	Weight (kg)	Order No.	Price in € w/o VAT
BLT 320 KB (shown with accessories: GN containers) 	<u>BLT 320 KB</u>	BLANCOTHERM 320 KB synthetic food transport container, heated, with power on/off indicator, max. temperature +90 °C, with lid, inside container of stainless steel 18/10	GN 1/1-200 or their subdivisions	630 x 425 x 375 mm	0.4 kW 220–240 V 50–60 Hz	13.5 kg	566 242	
BLT 320 KBR (shown with accessories: GN containers) 	<u>BLT 320 KBR</u>	BLANCOTHERM 320 KBR synthetic food transport container, with digital temperature control for adjusting the interior container temperature in 1° increments from +40 °C to +95 °C, with lid, inside container of stainless steel 18/10	GN 1/1-200 or their subdivisions	630 x 425 x 375 mm	0.4 kW 220–240 V 50–60 Hz	13.5 kg	572 228	
BLT 420 KBUH 	<u>BLT 420 KBUH</u>	BLANCOTHERM 420 KBUH synthetic food transport container, convection-heated, with power on/off indicator, max. temperature +90 °C, with hinged door	2x GN 1/1-150 or their subdivisions 11 pairs of support ledges with spacing of 31 mm	700 x 445 x 475 mm	0.2 kW 220–240 V 50–60 Hz	16 kg	573 515	
BLT 420 KBRUH 	<u>BLT 420 KBRUH</u>	BLANCOTHERM 420 KBRUH synthetic food transport container, convection-heated, with digital temperature control for adjusting the interior temperature in 1° increments from +40 °C to +85 °C, with hinged door	2x GN 1/1-150 or their subdivisions 11 pairs of support ledges with spacing of 31 mm	700 x 445 x 475 mm	0.2 kW 220–240 V 50–60 Hz	16 kg	573 516	
BLT 620 KBUH 	<u>BLT 620 KBUH</u>	BLANCOTHERM 620 KBUH synthetic food transport container, convection-heated, with power on/off indicator, max. temperature +90 °C, with hinged door	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	700 x 445 x 660 mm	0.2 kW 220–240 V 50–60 Hz	19.5 kg	572 536	
BLT 620 KBUH-F 	<u>BLT 620 KBUH-F</u>	BLANCOTHERM 620 KBUH-F synthetic food transport container, convection-heated, with power on/off indicator, max. temperature +90 °C, mobile, with synthetic castors in accordance with DIN 18867-8, 4 steering castors, 2 of which have brakes, with hinged door	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	700 x 445 x 830 mm	0.2 kW 220–240 V 50–60 Hz	27 kg	573 314	

BLANCOTHERM synthetic

- Of food-resistant polypropylene
- Dishwasher-safe (convection-heated BLT without door only)



BLT synthetic, heated

Illustration	Model	Designation	Capacity	Dimensions L x W x H (mm)	Rating/ conn. load	Weight (kg)	Order No.	Price in € w/o VAT
BLT 620 KBUH-F with condensation water trough 	BLT 620 KBUH-F with condensation water trough	BLANCOTHERM 620 KBUH-F with condensation water trough synthetic food transport con- tainer, convection-heated, with power on/off indicator, max. temperature +90 °C, mobile, with synthetic cas- tors in accordance with DIN 18867-8, 4 steering castors, 2 of which have brakes, with hinged door	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	700 x 445 x 830 mm	0.2 kW 220-240 V 50-60 Hz	28 kg	573 318	
BLT 620 KBRUH 	BLT 620 KBRUH	BLANCOTHERM 620 KBRUH synthetic food transport con- tainer, convection-heated, <u>with digital temperature con- trol</u> for adjusting the interior temperature in 1° increments from +40 °C to +85 °C, with hinged door	3x GN 1/1-150 or their subdivi- sions 12 pairs of support ledges with spacing of 39 mm	700 x 445 x 660 mm	0.2 kW 220-240 V 50-60 Hz	19.5 kg	572 537	
BLT 620 KBRUH-F 	BLT 620 KBRUH-F	BLANCOTHERM 620 KBRUH-F synthetic food transport con- tainer, convection-heated, <u>with digital temperature con- trol</u> for adjusting the interior temperature down to the de- gree from +40 °C to +85 °C, mobile, with synthetic castors in accordance with DIN 18867-8, 4 steering castors, 2 of which have brakes, with hinged door	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	700 x 445 x 830 mm	0.2 kW 220-240 V 50-60 Hz	27 kg	573 315	
BLT 620 KBRUH-F with condensation water trough 	BLT 620 KBRUH-F with condensation water trough	BLANCOTHERM 620 KBRUH-F with condensa- tion water trough synthetic food transport con- tainer, convection-heated, <u>with digital temperature control</u> for adjusting the interior temperature down to the degree from +40 °C to +85 °C, mobile, with synthetic castors in accordance with DIN 18867-8, 4 steering cas- tors, 2 of which have brakes, with hinged door	3x GN 1/1-150 or their subdivisions 12 pairs of support ledges with spacing of 39 mm	700 x 445 x 830 mm	0.2 kW 220-240 V 50-60 Hz	28 kg	573 319	

Accessories for BLANCOTHERM synthetic

- * Corrosion-resistant pursuant to DIN 18867-8

Accessories

Illustration	Model	Designation	For models	Dimensions L x W x H (mm)	Weight/ load cap. (kg)	Castors dia. 125 mm	Order No.	Price in € w/o VAT
ROLA 13 	ROLA 13	Serving dolly with lid recepta- cle, made of cor- rosion-resistant stainless steel	1x BLT 160 K or 1x BLT 320 K/KB/KBR/ECO	592 x 425 x 535 mm	10 kg 25 kg	4 steering cas- tors, 2 of which have brakes		
						synthetic *	572 341	
						galvanized steel	572 342	
ROLLI-100 	<u>ROLLI-100</u>	Serving dolly, made of polypro- pylene	4x BLT 160 K or 3x BLT 320 K/KB/KBR/ECO or 2x BLT 420 K/KBUH/KBRUH or 2x BLT 620 K/KBUH/KBRUH	650 x 450 x 165 mm	4.5 kg 130 kg	galvanized steel 4 steering cas- tors, 2 of which have brakes, dia. 100 mm	568 236	
	<u>ROLLI-125</u>	Serving dolly, made of polypro- pylene	4x BLT 160 K or 3x 320 K/KB/KBR/ECO or 2x BLT 420 K/KBUH/KBRUH or 2x BLT 620 K/KBUH/KBRUH	650 x 450 x 190 mm	4.5 kg 180 kg	synthetic * 4 steering cas- tors, 2 of which have brakes, dia. 125 mm	568 237	
not shown	Push bar	Push bar for better manoeuvring, made of corrosion- resistant stainless steel	ROLLI-100 or ROLLI-125	800 mm dia. 20 mm			568 926	
BTA 3 	BTA 3	Transport and serving trolley made of corrosion- resistant stainless steel, 2 shelves: 940 x 700 mm, clear height between shelves: 300 mm	2x BLT 160 K or 2x BLT 320 K/KB/KBR or 2x BLT 420 K/KBUH/KBRUH or 2x BLT 620 K/KBUH/KBRUH	1070 x 780 x 840 mm	31 kg 150 kg max. load per shelf: 100 kg	4 steering cas- tors, 2 of which have brakes		
						synthetic *	572 325	
						galvanized steel	572 326	

Accessories for BLANCOTHERM synthetic

Accessories							
Illustration	Model	Designation	For models	Dimensions L x W x H (mm)	Weight (kg)	Order No.	Price in € w/o VAT
	<u>Eutectic plate</u>	Eutectic plate (-3 °C) synthetic, Gastronorm-compatible	BLT 420 K or BLT 620 K	530 x 325 x 30 mm	4.2 kg	568 136	
			BLT 160 K or BLT 320 ECO/K	483 x 283 x 36 mm	4.0 kg	569 315	
		Eutectic plate (-12 °C) synthetic, Gastronorm-compatible	BLT 420 K or BLT 620 K	530 x 325 x 30 mm	4.2 kg	573 332	
Slide-in frame (shown with accessories: GN support bar) 	<u>Slide-in frame</u>	Slide-in frame of stainless steel suitable for Gas- tronorm containers up to 150 mm deep	BLT 420 K/KBUH/KBRUH or BLT 620 K/KBUH/KBRUH	530 x 325 x 156 mm	0.5 kg	564 352	
ST 3 	<u>ST 3</u>	GN support bar of stainless steel for container combination, required with GN 1/4, 1/6 and 1/9	BLT 160 K or BLT 320 ECO/K/KB/KBR or slide-in frame	Length: 325 mm		550 650	
ST 5 	<u>ST 5</u>	GN support bar of stainless steel, with spring lock, for container combination, required with GN 1/4, 1/6 and 1/9	BLT 160 K or BLT 320 ECO/K/KB/KBR or slide-in frame	Length: 530 mm		550 651	
Special pen 	<u>Special pen</u>	Special washable pen for labelling menu cards	all BLT K			564 361	
Menu card 	<u>Menu card</u>	BLANCOTHERM menu card , blank	all BLT K	DIN A 6 (148 x 105 mm)		564 353	
Menu card box (shown with accessories: menu cards) 	<u>Menu card box</u>	Menu card box for BLANCOTHERM menu cards (Capacity: 25 cards)	all BLT K	165 x 96 x 128 mm		564 355	

BLANCOTHERM stainless steel

- With synthetic castors, corrosion-resistant in compliance with DIN 18867-8
- 125 mm dia., 2 fixed castors, 2 steering castors with locking brakes



BLT stainless steel, unheated









Illustration	Model	Designation	Capacity	Dimensions L x W x H (mm)	Weight (kg)	Order No.	Price in € w/o VAT
	BLT 820 E	BLANCOTHERM 820 E stainless steel food transport container, with hinged door, mobile	GN container up to a max. of 3x GN 1/1-200 11 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 815 x 977 mm	56 kg	572 515	
	BLT 1020 E	BLANCOTHERM 1020 E stainless steel food transport container, with hinged door, mobile	GN container up to a max. of 3x GN 1/1-200 + 1x GN 1/1-100 14 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 815 x 1150 mm	63 kg	572 518	
	BLT 1220 E	BLANCOTHERM 1220 E stainless steel food transport container, with hinged door, mobile	GN container up to a max. of 5x GN 1/1-200 20 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 815 x 1495 mm	83 kg	572 520	

BLANCOTHERM stainless steel

- With synthetic castors, corrosion-resistant in compliance with DIN 18867-8
- 125 mm dia., 2 fixed castors, 2 steering castors with locking brakes



BLT stainless steel, heated



Illustration	Model	Designation	Capacity	Dimensions L x W x H (mm)	Rating/ conn. load	Weight (kg)	Order No.	Price in € w/o VAT
 	BLT 820 EB	BLANCOTHERM 820 EB stainless steel food transport container, heated, with hinged door, mobile, temperature range: +30 °C to +90 °C	GN container up to a max. of 3x GN 1/1-200 11 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 815 x 977 mm	220–240 V AC 50–60 Hz 0.38 kW	59 kg	572 516	
 	BLT 820 EBT	BLANCOTHERM 820 EBT stainless steel food transport container, heated, top and front loader, mobile, temperature range: +30 °C to +90 °C	GN container up to a max. of 3x GN 1/1-200 11 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 815 x 1060 mm Operating height: 977 mm	220–240 V AC 50–60 Hz 0.38 kW	61 kg	572 517	
 	BLT 1020 EB	BLANCOTHERM 1020 EB stainless steel food transport container, heated, with hinged door, mobile, temperature range: +30 °C to +90 °C	GN container up to a max. of 3x GN 1/1-200 + 1x GN 1/1-100 14 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 815 x 1150 mm	220–240 V AC 50–60 Hz 0.38 kW	66 kg	572 519	
 	<u>BLT 1220 EB</u>	BLANCOTHERM 1220 EB stainless steel food transport container, heated, with hinged door, mobile, temperature range: +30 °C to +90 °C	GN container up to a max. of 5x GN 1/1-200 20 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 815 x 1495 mm	220–240 V AC 50–60 Hz 0.76 kW	86 kg	572 521	

BLANCOTHERM stainless steel

- With synthetic castors, corrosion-resistant in compliance with DIN 18867-8
- 125 mm dia., 2 fixed castors, 2 steering castors with locking brakes






BLT stainless steel, convection-cooled

Illustration	Model	Designation	Capacity	Dimensions L x W x H (mm)	Rating/ conn. load	Weight (kg)	Order No.	Price in € w/o VAT
	BLT 1020 EUK	BLANCOTHERM 1020 EUK stainless steel food transport container, convection-cooled, with hinged door, mobile, temperature range: +2 °C to +15 °C	GN container up to a max. of 3x GN 1/1-200 + 1x GN 1/1-100 14 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 845 x 1430 mm	220-240 V AC 50 Hz 0.3 kW	100 kg	572 862	
	BLT 1220 EUK	BLANCOTHERM 1220 EUK stainless steel food transport container, convection-cooled, with hinged door, mobile, temperature range: +2 °C to +15 °C	GN container up to a max. of 5x GN 1/1-200 20 pairs of support ledges with spacing of 57.5 mm between ledges	540 x 845 x 1775 mm	220-240 V AC 50 Hz 0.3 kW	120 kg	572 863	





Accessories for BLANCOTHERM stainless steel

Accessories for all BLT stainless steel models

Illustration	Model	Designation	Dimensions L x W x H (mm)	Weight (kg)	Order No.	Price in € w/o VAT
	<u>Eutectic plate</u>	Eutectic plate (-3 °C) synthetic, Gastronorm-compatible	530 x 325 x 30 mm	4.2 kg	568 136	
		Eutectic plate (-12 °C) synthetic, Gastronorm-compatible			573 332	
not shown	<u>Slide-in frame</u>	Slide-in frame of stainless steel for Gastronorm containers up to 150 mm deep	530 x 325 x 156 mm		564 352	
	<u>ST 3</u>	GN support bar of stainless steel for container combination, required with GN 1/4, 1/6 and 1/9	Length: 325 mm		550 650	
	<u>ST 5</u>	GN support bar of stainless steel with spring lock, for container combination, required with GN 1/4, 1/6 and 1/9	Length: 530 mm		550 651	

Accessories for BLANCOTHERM stainless steel

Accessories for all BLT stainless steel models

Illustration	Model	Designation	Dimensions L x W x H (mm)	Weight (kg)	Order No.	Price in € w/o VAT
Special pen 	<u>Special pen</u>	Special washable pen for labelling menu cards			564 361	
not shown 	<u>Menu card holder</u>	Menu card holder for front side of door				
BLT E menu card 	<u>BLT E menu card</u>	BLT E menu card with hanging slot (blank)	DIN A6 (148 x 105 mm)		572 513	
Menu card box (shown with accessories: menu cards) 	<u>Menu card box</u>	Menu card box for BLANCOTHERM menu cards (Capacity: 25 cards)			564 355	
not shown	<u>Push handle</u>	additional pull handle on back of unit	dia. 32 mm			
	Door not removable					no added price

Castor options for BLT stainless steel

Model	Designation	For model	Price in € w/o VAT
Anti-static castors	2 fixed and 2 steering castors with brakes, corr.-resist. in compliance with DIN 18867-8, synthetic, 125 mm dia. (in conjunction with 540 x 815 mm bottom plate)	all BLT stainless steel	
Stainless-steel castors	2 fixed and steering castors with brakes, 125 mm dia. (in conjunction with 540 x 815 mm bottom plate)	all BLT stainless steel	
	2 fixed and 2 steering castors with brakes, 160 mm dia. (in conjunction with 640 x 845 mm bottom plate)	all BLT E and BLT EB models	
	2 fixed and 2 steering castors with brakes, 160 mm dia. (in conjunction with 700 x 845 mm bottom plate)	BLT EUK	
	2 fixed and 2 steering castors with brakes, with elastic castors, 160 mm dia. (in conjunction with 640 x 845 mm bottom plate)	all BLT E and BLT EB models	
	2 fixed and 2 steering castors with brakes, with elastic castors, 160 mm dia. (in conjunction with 700 x 845 mm bottom plate)	BLT EUK	
Galvanized steel castors	2 fixed and 2 steering castors with brakes, 160 mm dia. (in conjunction with 640 x 845 mm bottom plate)	all BLT E and BLT EB models	
	2 fixed and 2 steering castors with brakes, 160 mm dia. (in conjunction with 700 x 845 mm bottom plate)	BLT EUK	
	2 fixed and 2 steering castors with brakes, with elastic castors, 160 mm dia. (in conjunction with 640 x 845 mm bottom plate)	all BLT E and BLT EB models	
	2 fixed and 2 steering castors with brakes, with elastic castors, 160 mm dia. (in conjunction with 700 x 845 mm bottom plate)	BLT EUK	

