

SDE30

30 kg Self-contained Ice Cuber

SIMAG

Other models in this range: SDE18 - SDE24 - SDE 34 - SDE40 - SDE50 - SDE64 - SDE84 - SDE100 - SDE170 - SDE220

Technical Features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system
- Refrigerant R134a

24 Hour Ice Production - 10°C/10° C

Air Cooled	30 kg	No. of cubes 1420
Water Cooled	28 kg	No. of cubes 1330

Bin Capacity

kg 6

Warranty

3 years warranty on components

Voltage

230/50/1 standard version

220-240/60/1 on demand



Technology and Certifications



Certified ISO 9001



21 g



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SDE30

30 kg Self-contained Ice Cuber



Other models in this range: SDE18 - SDE24 - SDE 34 - SDE40 - SDE50 - SDE64 - SDE84 - SDE100 - SDE170 - SDE220

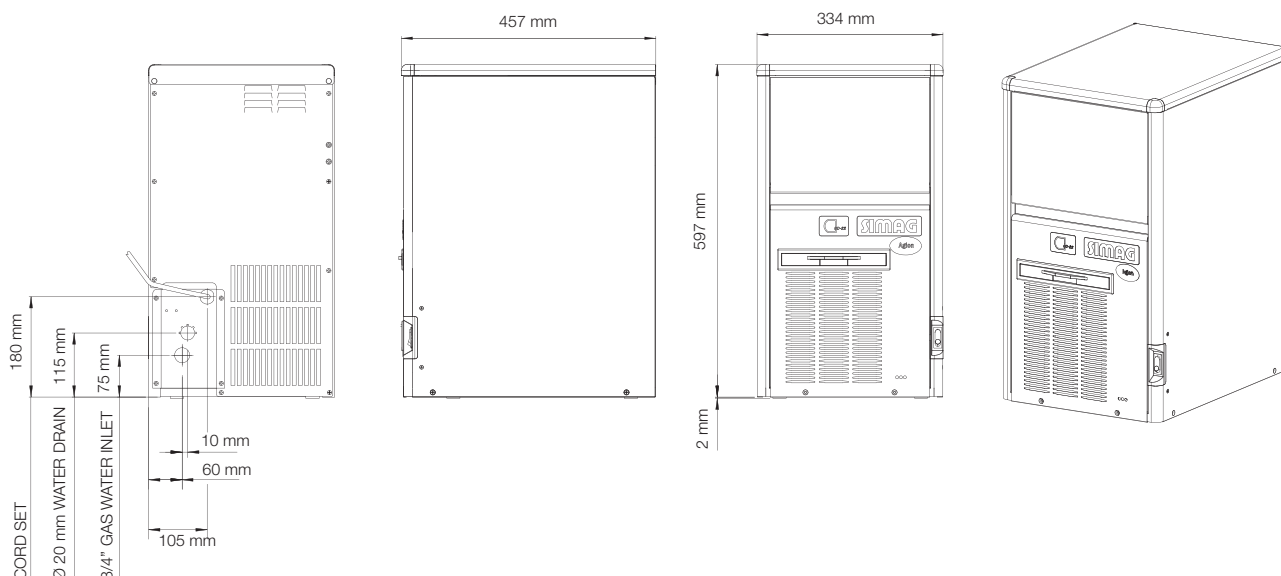

* DRAINAGE PER GRAVITY



CONTROL BOARD



SPRAY BAR
New spray bar
with nozzles in
fixed position



MAIN SWITCH
New embedded
main switch



CLEANING SYSTEM
Easy cleaning of
water pump filter
(except SDN20-25)



VENTILATING GRILLE
New ventilating grille
in water cooled version



TOP ANGLE
New top plastic
round corners



AIR FILTER
New condenser air filter
for air cooled version
(except SDN20)

Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	43°C
Water Temperatures	5°C	38°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject
to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Refrigerant charge kg	Fuse Amp	Water Consumption l/h (**)	Net Weight kg	Shipping Weight kg
SDE 30 AS	230/50/1	380	R134a	0,21	10	4,2	28	33
SDE 30 AS	220-240/60/1	380	R134a	0,21	10	4,2	28	33
SDE 30 WS	230/50/1	220	R134a	0,17	10	35,5	28	33
SDE 30 WS	220-240/60/1	220	R134a	0,17	10	35,5	28	33

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water