




- | | |
|--|------------------------------|
| 1. Power cable entry 5x6
(400Vx3N/230Vx3N-50Hz) | 3. Water loading pipe Ø3/4"G |
| 2. Water drain pipe Ø40 Hmax=30cm | 4. Equipotential |
| | 5. Dosing pumps entry |

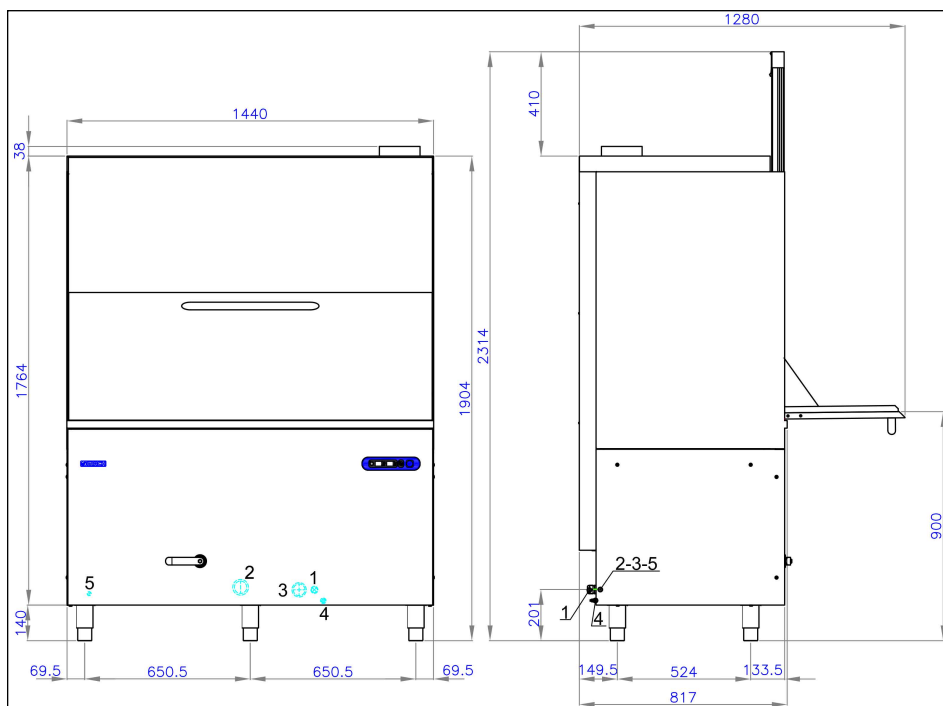

- Single wall.
- Tank with rounded corners
- Full-width wash tank filters.
- Front tap for water drain.
- TOUCH control panel with 5 preset wash cycle times.
- Magnetic microswitch to cut out operation of the appliance when door is opened.
- Useful washing height 80 cm.
- Basket 130x69 cm (supplied with 1 s/s universal basket, 1 s/s insert for 10 trays, 1 s/s cutlery holder, 1 s/s insert for squirtbags).
- Independent double lower/upper washing and rinsing arms.
- Washing cycle time 3-5-7-9-11 minutes.
- Displays show the boiler and tank temperature.
- Countdown of the washing cycle underway in minutes and seconds.
- Standard built-in detergent pump.
- Self-cleaning cycle (CLN).
- Booster pump and built-in insulated atmospheric rinse tank made in AISI 304L stainless steel.
- Boiler and tank heating through thermostatically protected armoured heating elements (in exchange).
- Tank capacity lt. 88 and boiler capacity lt. 34.
- Water consumption per cycle lt. 25 - Water pressure input ATE 2,5-4,0 - Max temperature of inlet water 50°C.
- Tank heating element kW 9,0 - Boiler heating element 2 x kW 6,0.
- Washing pump power 2 x Hp 3,2.
- Booster pump power kW 0,37.
- Noise level at 1 mt. < 70 dbA.
- Total power kW 16,80.

Note